DEPURAL[®] DP / DP CASE

MOBILE FILTER HOUSINGS

A range of mobile filter housings made up with patented and registered DP MONO, DP DUO and DP TRIO housings, DEPURAL DP are especially designed for counter-top use, complete with standing base, installation kit and universal adaptor for easy connection to the tap.

DEPURAL DP housings are available in 3 main versions:

- DEPURAL® DP MONO single clear (TS) or white (BW) housings.
- DEPURAL® DP DUO double clear (TS) or white (BW) housings.
- DEPURAL® DP TRIO triple clear (TS) or white (BW) housings.

Exclusive DEPURAL[®] DP CASE with DP TRIO housings in plastic case is a portable version of **mobile filters**, complete with universal tap adaptor and connection kit.

A variety of DEPURAL® DP housings fit to 5", 7", 10" cartridges with both standard SX flat seals (DOE) and BX quick-fit double o-ring end-cap, all available from the wide range of Atlas Filtri cartridges SX and BX type. All housings are provided with Filter-Fit, special centering device for SX cartridges.

DEPURAL® DP housings are manufactured with the finest and most advanced materials under constant focus on innovative processing technologies and ceaseless modernization to ensure the absolute quality of our products.

A range of accessories is available on demand: spanner, wall brackets.



 cartridges with standard flat seals.




cartridges with 45 mm double o-ring collar. Quick-fit connection for a perfect tightening.

Statuto Conformate 25/2012 Attestation de San Italice ACCS

Housings are tested and certified under the most stringent procedures worldwide, in compliance with DM 25 (Italy), with the sanitary certification ACS (France) and EAC/Ghostreghistrazia (Russia).


ACCESSORIES INCLUDED

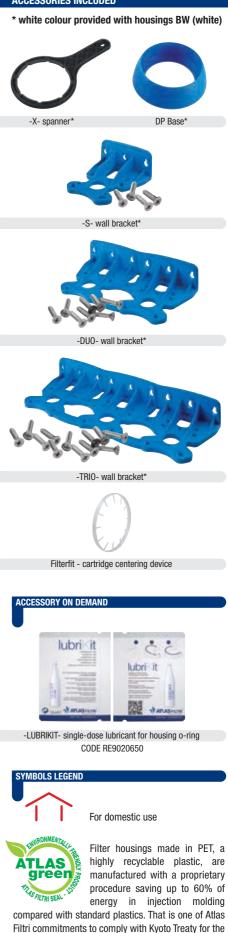

reduction of green house gas (CO₂) emissions in the

atmosphere.

+

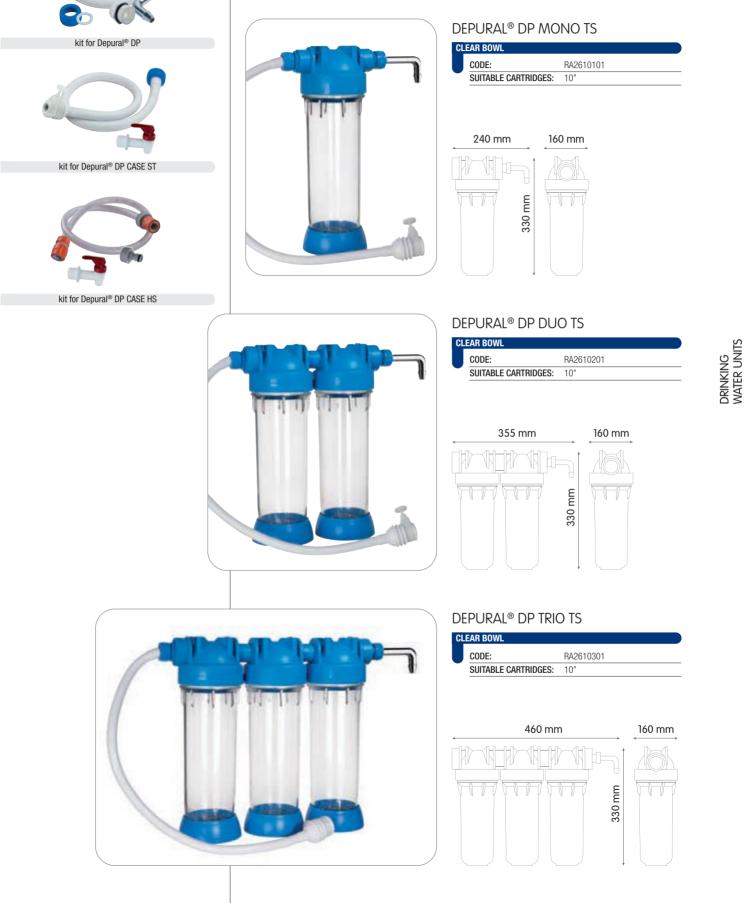



DEPURAL® DP WORKING CONDITIONS

_3 bar (43 psi) _45°C (113°F)

_4°C (39,2°F)

Non-toxic materials, suitable for drinking water.

Breather-valve: body stainless steel, o-ring EPDM.

Head: reinforced polypropylene.

Bowl: PET. 0-rings: EPDM.


DEPURAL® DP and DEPURAL® DP CASE

Max working pressure _____ Max working temperature

Min working temperature _

+







RA2610302



WHITE BOWL CODE:

SUITABLE CARTRIDGES: 10"













WORKING CONDITIONS	
Max working pressure	3 bar (43 psi)
Max working temperature	45°C (113°F)
Min working temperature	4°C (39,2°F)

HOUSINGS SPECIFICATIONS Non-toxic materials, suitable for drinking water. Head: reinforced polypropylene. Bowl: PET. O-rings: EPDM. Breather-valve: body stainless steel, o-ring EPDM.

+



PURAL[®] DP (SF F HOUSINGS SPECIFICATION

WORKING CONDITIONS

Max working pressure	3 bar (43 psi)
Max working temperature	45°C (113°F)
Min working temperature	4°C (39,2°F)


۲

Non-toxic materials, suitable for drinking water. Head: reinforced polypropylene. Bowl: PET. O-rings: EPDM. Breather-valve: body stainless steel, o-ring EPDM.

CODE:

SUITABLE CARTRIDGES:





RA6081402

10"


DEPURAL® DP CASE HS BW

GARDEN HOSE

CODE:



+



RA6081401



Drinking Water Units